




**ELITE 2000/2500**  
*Nissan RB Twin Cam*  
*Terminated Engine Harness*  
*(HT - 130326)*  
**QUICK START GUIDE**

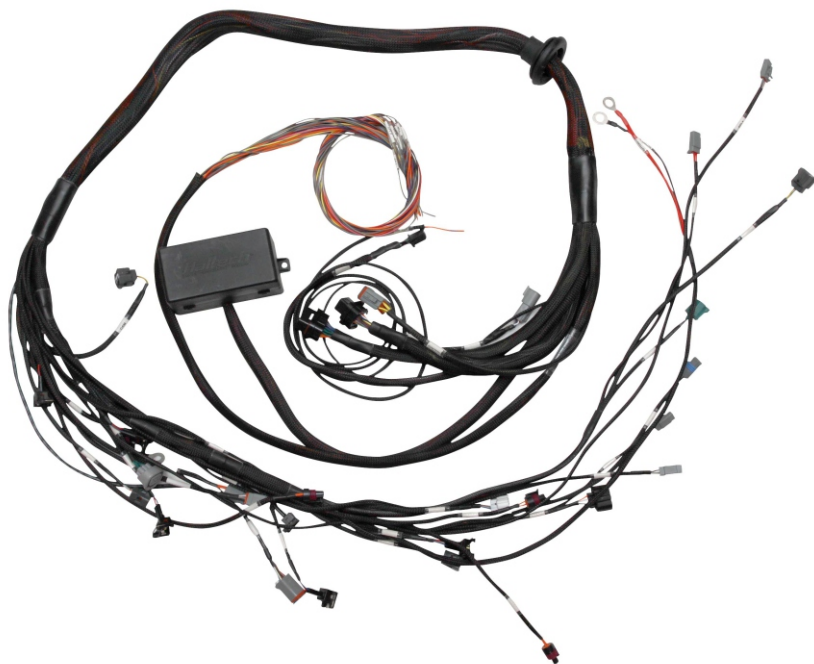

## **Haltech Off-Road Usage Policy**

In many states It is unlawful to tamper with your vehicle's emissions equipment.

Haltech products are designed and sold for sanctioned off-road/competition non-emissions controlled vehicles only and may never be used on public road or highway. Using Haltech products for street/road use on public roads is prohibited by law unless a specific regulatory exemption exist (more information can be found on the SEMA Action Network website [www.semanan.com/emissions](http://www.semanan.com/emissions) for state by state details in the USA). It is the responsibility of the installer and/or user of this product to ensure compliance with all applicable local and federal laws and regulations. Please check with your local vehicle authority before purchasing, using or installing any Haltech product.

## **Installation of Haltech Products**

No responsibility whatsoever is accepted by Haltech for the fitment of Haltech Products. The onus is clearly on the installer to ensure that both their knowledge and the parts selected are correct for that particular application. Any damage to parts or consequential damage or costs resulting from the incorrect installation of Haltech products are totally the responsibility of the installer. Always disconnect the battery when doing electrical work on your vehicle. Avoid sparks, open flames or use of electrical devices near flammable substances. Do not run the engine with a battery charger connected as this could damage the ECU and other electrical equipment. Do not overcharge the battery or reverse the polarity of the battery or any charging unit. Disconnect the Haltech ECU from the electrical system whenever doing any welding on the vehicle by unplugging the wiring harness connector from the ECU. After completing the ECU installation, make sure there is no wiring left un-insulated. Uninsulated wiring can cause sparks, short circuits and in some cases fire. Before attempting to run the engine ensure there are no leaks in the fuel system. All fuel system components and wiring should be mounted away from heat sources, shielded if necessary and well ventilated. Always ensure that you follow workshop safety procedures. If you're working underneath a jacked-up car, always use safety stands!

## **Haltech Limited Warranty**

Unless specified otherwise, Haltech warrants its products to be free from defects in material or workmanship for a period of 12 months from the date of purchase, valid in the original country of purchase only. Proof of purchase, in the form of a bill of sale or receipted invoice, which indicates that the product is within the warranty period, must be presented to obtain warranty service. Haltech suggests that the purchaser retain the dealer's dated bill of sale/receipt as evidence of the date of retail purchase. If the Haltech product is found to be defective as mentioned above, it will be replaced or repaired if returned prepaid along with proof of purchase. This shall constitute the sole liability of Haltech. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representations, either expressed or implied, including any implied warranty of merchantability or fitness. In no event shall Haltech, be liable for special or consequential damages.

## **Product Returns**

Please include a copy of the original purchase invoice along with the unused, undamaged product and its original packaging. Any product returned with missing accessory items or packaging will incur extra charges to return the item to a re-saleable condition. All product returns must be sent via a freight method with adequate tracking, insurance and proof of delivery services. Haltech will not be held responsible for product returns lost during transit. The sale of any sensor or accessory that is supplied in sealed packaging is strictly non-refundable if the sealed packaging has been opened or tampered with. This will be clearly noted on the product packaging. If you do not accept these terms please return the sensor in its original unopened packaging within 30 days for a full refund.

**Returning a sensor or accessory product within 30 days of purchase:** Product may be returned for credit or full refund. (Any sealed packaging must not have been opened or tampered with)

**Returning a sensor or accessory product after 30 days of purchase:** Product may be returned for credit only (no refunds given) and is subject to a 10% Restocking fee. (Any sealed packaging must not have been opened or tampered with)

# **Haltech Nissan RB Twin Cam** **Terminated Engine Harness** **Quick Start Guide**

Congratulations on purchasing a Haltech Engine Management terminated engine harness. This *Plug and Play* product allows you to be up and running in a few hours. This Harness when installed in conjunction with a Haltech Elite 2000 / 2500 ECU opens the door to virtually limitless performance modification and tuning of your vehicle. Programmable systems allow you to extract all the performance from your engine by delivering precisely the required amount of fuel and ignition timing that your engine requires for maximum output under all operating conditions.

This quick start guide will walk you through the installation of the Haltech Nissan RB twin cam terminated engine harness into a vehicle. This guide is accompanied by the comprehensive help menu located within the ESP software that you or your tuner will need to refer to before completing your installation and configuration. The ESP software is located on the Haltech Resource Centre CD/USB provided with the ECU. The latest version of the software can also be downloaded from the Haltech website [www.haltech.com](http://www.haltech.com)

## **Supported Engine**

The Haltech Nissan RB twin cam terminated engine harness supports the following engine configurations:

- Nissan RB20
- Nissan RB25
- Nissan RB26

## **Supported ECU**

- Haltech Elite 2000
- Haltech Elite 2500

## **Included in this package**

- Haltech Nissan RB twin cam terminated engine harness
- Connector pack

## **Optional Accessories (Sold Separately)**

- Haltech Nissan RB Twin Cam Ignition Harness for OEM External Ignitor Coils (HT-130331)
- Haltech Nissan RB Twin Cam Ignition Harness for OEM Internal Ignitor Coils (HT-130330)
- Haltech Nissan RB Twin Cam Flying Lead Ignition Harness (HT-130329)
- Haltech Nissan RB Twin Cam Factory CAS harness (HT-130327)
- Haltech "TI" 5 Bar Map Sensor (HT-010110)
- Haltech Air Temperature Sensor - Small thread (HT-010200)
- Haltech Coolant Temperature Sensor - Small thread (HT-010300)
- Haltech 150PSI "TI" Fuel/Oil/Wastegate Pressure Sensor (HT-010904)

# Harness Overview

The Haltech Nissan RB twin cam terminated engine harness is a plug and play solution for wiring a RB20, RB25, RB26 engines.

Installation is simple and easy as the harness is designed for the engine, all lengths are correct and all wires are clearly labeled.

Suits twin cam engines.

## Notes on installation:

- Make sure your engine is grounded to the battery. A ground wire / earthing strap should be used to ground your engine to the battery of the vehicle. The Haltech terminated engine harness **does not** ground your engine.

### **WARNING!**

**Damage can occur to your harness and / or ECU if you do not ground your engine properly. Please ensure heavy gauge cable is used.**

- Integrated alternator connection
- Integrated starter motor solenoid connection
- Ignition harness sold separately.
  - HT-130330 for coils with built-in ignitors
  - HT-130331 for coils using external factory ignitor
- OEM CAS harness sold separately (HT-130327)
- Internal 3 bar or external Haltech 5 bar "TI"MAP sensor required for use.
- Integrated coolant temperature gauge connection
- Integrated alternator dash light connection
- Integrated oil pressure switch and oil pressure gauge connection

### **WARNING!**

**Please keep all wires away from exhaust manifold!**

# Harness Connections

## Main Power

The main power connections supply power through the harness labelled as “**Battery +**” and “**Battery -**”. Please ensure these connections are connected after all other connections have been completed and all unused in cabin wiring insulated.

The ECU main power consist's of the following:

### **Injection Battery + (R)**

The Injection Battery + (Red) connection will supply +12V DC to the injector relay within the harness. Please connect this cable directly to the battery (+) terminal.

### **ECU Battery + (R/W)**

The ECU Battery + (Red / White) connection will supply +12V DC to the ECU relay within the harness. Please connect this cable directly to the battery (+) terminal.

### **Battery + (R/G)**

The Battery + (Red/Green) connection will supply +12V DC to the ignition and fuel pump relay within the harness. Please connect this cable directly to the battery (+) terminal.

## Battery Ground (B)

The Battery Ground (Black) connection supplies battery ground for the harness. The battery ground lug consists of one cable terminated with a 10mm ID eyelet. Please connect this cable directly to the Battery (-) Supply terminal.

### **WARNING!**

**Please make sure your engine block is grounded to the battery of the vehicle by a correctly sized grounding strap. This harness will not ground your engine. Damage can occur to this harness and / or your ECU if your engine is not properly grounded.**

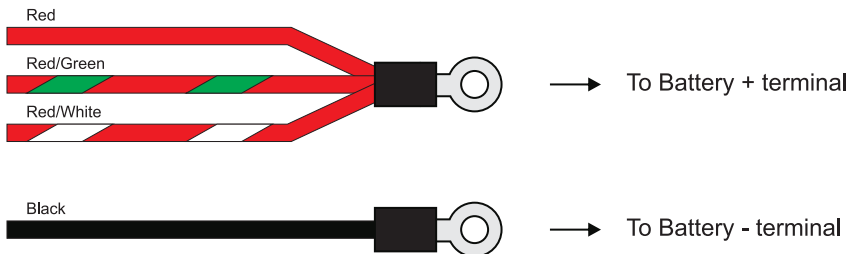


Figure 1 - Main Power Connections

# Termination Description

## Injection 1 - 6 (INJ1, INJ2, INJ3, INJ4, INJ5, INJ6)

The injector outputs connect directly to the injectors.

Please ensure the correct injector output is connected to the corresponding injector in the engine. Refer to the label on the harness for correct injector allocation.

## Ignition Output Connector

The Haltech Elite 2000 / 2500 Nissan RB twin cam terminated engine harness is setup to be used with both:

- OEM coils (with built in ignitor) - order ignition harness part number HT-130330
- OEM non-internal ignitor coils - order ignition harness part number HT-130331

For more information on setup please see the quick start guide that is included with the ignition harness.

**The ignition output comprises of the following connectors:**

### Ignition Outputs - 6way OEM connector (IGNITION A)

These wires are the ignition outputs of the ECU and can be connected to the factory ignitor chip or built-in ignitor coil ignition harness to control the ignition.

### Ignition Power - 3 way OEM connector (IGNITION B):


This connector consists of:

### Battery Ground (B)


This wire supplies battery ground to ignition coils.

### +12V DC Switched (R / Y)

This wire supplies switched +12V DC to the coils from the ignition relay (R3) located inside the fusebox.

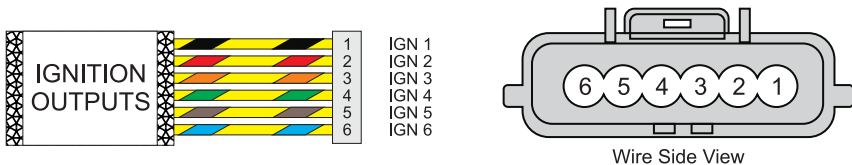

**Figure 2 - Ignition Output Connector (Ignition A)**

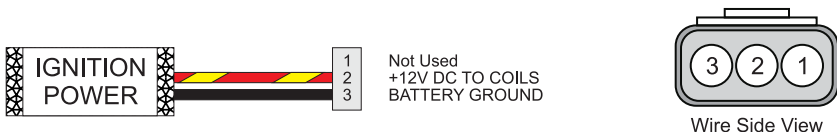

**Figure 2.1 - Ignition Power Output Connector (Ignition B)**

## Intake Air Temperature Sensor (IAT) - AVI 7

An air temperature sensor is a required sensor used in Volumetric Efficiency (VE) tuning to compensate for changes in air density due to air temperature. Cold air has a higher density than warm air and therefore requires a greater volume of fuel to maintain the same air/fuel ratio. For this reason an air temperature sensor (HT-010200) can be used as a substitute to the factory air temperature sensor. The sensor needs to be mounted after any turbo / intercooler in the moving airstream to give fast response times and reduce heat soak effects.

## Engine Coolant Temperature Sensor (CTS) - AVI 8

The engine coolant temperature sensor provides the ECU with a signal that allows the ECU to know the current engine temperature. This harness can be connected directly to an optional Haltech coolant temperature sensor (HT-010300).

This sensor can be purchased separately from [www.haltech.com](http://www.haltech.com).

## Engine Coolant Temperature Sensor Gauge (CTS-GAUGE)

The coolant temperature sensor gauge wire connects directly to an OEM instrument cluster temperature gauge. A wire has been run from the gauge sensor to the in cabin harness labelled "CTS-Gauge". This must be connected between OEM coolant gauge sensor and the dash cluster for correct operation of the cluster gauge.

## Manifold Pressure Sensor (MAP) - AVI 9

A MAP sensor is required when tuning an engine to compensate for changes in air density due to pressure. The MAP sensor is used to convert the pressure of air in the intake into an electrical signal for the ECU to use as a reference for engine load. The sensor works in absolute pressures, thus its calibration is not affected by changes in barometric pressure.

This harness is provisioned with the ability to connect an external Haltech 5 bar "TI" MAP Sensor (HT-010110) via a pre-terminated connector. This sensor may be purchased separately from [www.haltech.com](http://www.haltech.com).

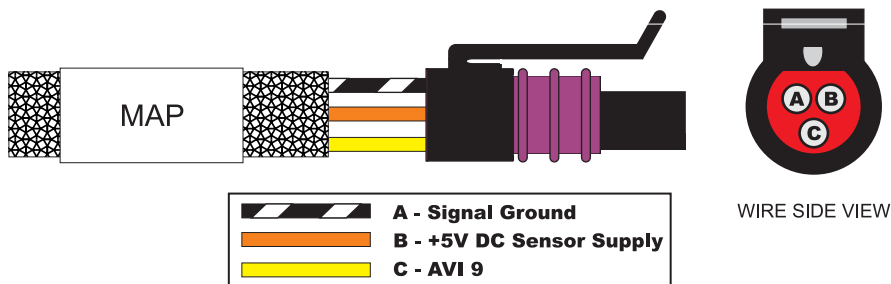


Figure 3 - Manifold Pressure Sensor Connector

## Knock Sensor (KNOCK1, KNOCK2)

The Knock1/2 labelled connectors connect directly to an optional Haltech Knock Sensor (HT-011100) mounted to the engine block. The signal is used by the ECU knock control function to detect knock events within the engine.

These sensors can be purchased separately from [www.haltech.com](http://www.haltech.com).

## Vehicle Speed Sensor (VSS) - SPI4

The vehicle speed sensor connector plugs directly to an OEM vehicle speed sensor located on the transmission.

## Throttle Position Sensor (TPS) - AVI 10

The Throttle Position Sensor (TPS) measures the throttle butterfly rotation.

This harness has been provisioned with the flying lead connection, to allow the end user alternative options for their throttle position sensor.



**Figure 4 - Throttle Position Sensor Connection**

## AAC Valve (IAC) - INJ8

The idle control function allows your Haltech ECU to control the engine idle speed. This harness has been fitted with an OEM IAC solenoid valve connector.

## VCT Solenoid - INJ 7 (VCT)

VCT or Variable Camshaft Timing, is a variable camshaft timing technology that allows for more optimum engine performance, reduced emissions, and increased fuel efficiency compared to engines with a fixed camshaft position. This harness comes pre-terminated with an OEM VCT solenoid connector.



### Fuel Pressure Sensor (Fuel-P) - AVI 3

The Fuel-P labelled connector connects directly to an optional Haltech 150PSI “TI” pressure sensor (HT-010904). This will enable the user to know the current fuel pressure of the vehicle. This sensor may be purchased separately from [www.haltech.com](http://www.haltech.com).

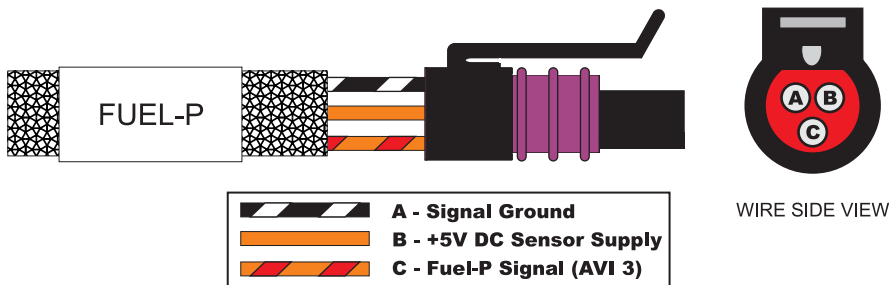


Figure 5 - Fuel Pressure Sensor Connections

### Oil Pressure Sensor (Oil-P) - AVI 4

The Oil-P labelled connector connects directly to an optional Haltech 150PSI “TI” pressure sensor (HT-010904). This will enable the user to know the current oil pressure of the vehicle. This sensor may be purchased separately from [www.haltech.com](http://www.haltech.com).

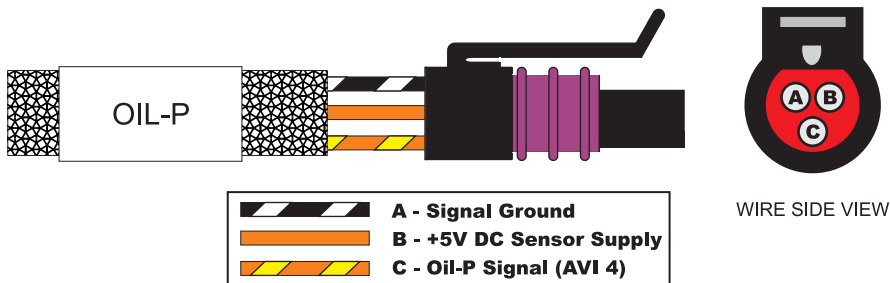


Figure 6 - Oil Pressure Sensor Connections

### OEM Oil Pressure Sensor Gauge (OIL-P GAUGE)

The oil pressure sensor gauge wire connects directly to an OEM instrument cluster pressure gauge. A wire has been run from the gauge sensor to the in cabin harness labelled “Oil-P Gauge”. This must be connected between the OEM oil pressure gauge sensor and the dash cluster for correct operation of the cluster gauge.

### OEM Oil Pressure Sensor Switch (OIL-P SWITCH)

The oil pressure sensor switch wire connects directly to an OEM instrument cluster pressure light. A wire has been run from the gauge sensor to the in cabin harness labelled “Oil-P Switch”. This must be connected between the OEM oil pressure gauge sensor and the dash cluster for correct operation of the cluster light.

## Alternator Regulation (ALT)

The Haltech RB Twin Cam terminated engine harness is provisioned with an OEM alternator regulator control connector. This connector consist of the following connections:

- +12V DC Battery + (Connected to Battery + via Haltech fuse box)
- Alternator Light (Connected directly to incabin loom for dash cluster support)


## Starter Motor Solenoid (STS)

The starter signal connects directly to starter motor solenoid. This will supply +12V to the solenoid on receiving a start signal from the ignition switch when in the start position.

**Please ensure you supply main power connection to the starter motor and a main earth strap to the engine to ensure correct operation of the starter motor and to avoid damage to your terminated harness and ECU.**

## Camshaft Position Sensor (CAS)


The Nissan camshaft position sensor is used to determine the camshaft position, engine position and engine speed. This harness comes pre-terminated with a 4 pin connector (Figure 7) to allow the end user alternative options for their camshaft position sensor. The Nissan RB Twin Cam camshaft position sensor harness (HT-130327) can be purchased separately from [www.haltech.com](http://www.haltech.com), alternatively see CAS breakout wiring information located below.



WIRE SIDE VIEW

Location	Description	Wire Colour
1	HOME +	GREEN
2	TRIGGER +	YELLOW
3	+12V DC SENSOR INPUT	RED
4	SIGNAL GROUND	BLUE


TERMINATED ENGINE HARNESS CAS BREAKOUT CONNECTOR WIRING



Wire Side View

Location	Description	Wire Colour
1	TRIGGER +	YELLOW
2	HOME +	GREEN
3	+12V DC SENSOR INPUT	RED
4	SIGNAL GROUND	BLUE

NISSAN R32/33 CAS CONNECTOR WIRING



Wire Side View

Location	Description	Wire Colour
1	SIGNAL GROUND	BLUE
2	+12V DC SENSOR INPUT	RED
3	HOME +	GREEN
4	TRIGGER +	YELLOW

NISSAN R34 CAS CONNECTOR WIRING

Figure 7 - CAS Breakout Connector Pinout

## Spare Digital Pulsed Outputs (DPO3, DPO4)

There are two spare Digital Pulsed Output (DPO) connectors located on the Haltech RB twin cam terminated engine harness. (DPO3 and DPO4). These connections consist of:

- +12V DC Sensor Supply
- Digital Pulsed Output


When the output is activated by the ECU, the output will switch to ground. Devices such as solenoid valves and shift lights can be run directly from the output provided that they do not exceed the maximum current draw of 1A, however high current devices such as thermofans and additional fuel pumps must be activated through a relay. A relay can be wired between the DPO and the supplied +12V DC on this connector. This way the output is only switching the relay and not a high current draw device.

**The Digital Pulsed Outputs are limited to 1A Max current draw.**

These outputs can be programmed within the ESP Software to control auxiliaries such as:

- A/C Output
- Aux Fuel Pump
- Boost Control
- Check Engine Light
- Intercooler Spray
- Shift Lights
- Thermofans

For a full list of output options and explanations please go to the help section within the ESP Software.

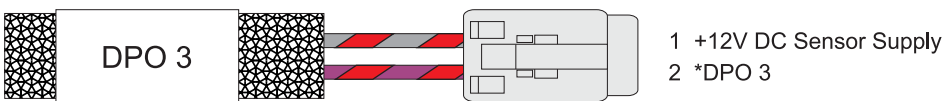

### \*DPO3

This output is pre-configured for Boost Control Solenoid but disabled within the supplied basemap. Please enable / reconfigure if required.




Figure 8 - Spare DPO3 / DPO4 outputs

## Spare Synchronised Pulsed Inputs (SPI1)

There is one Synchronised Pulsed Input (SPI) connector located on the RB Twin Cam terminated engine harness. (SPI1). This connector consists of the following connections:


- +12V DC Sensor Supply
- Signal Ground
- Synchronized Pulsed Input

Spare SPI1 comes pre-terminated with 3 pin connector.

This input can be programmed within the ESP Software to read inputs such as:

- Vehicle Speed Sensor
- A/C Request Switch
- Flex Fuel Composition Sensor
- Fuel Flow Sensor
- Clutch Switch

For a full list of output options and explanations please go to the help within the ESP Software.



**Figure 9 - Spare SPI1**

# In Cabin Harness

The in cabin harness wiring is made up of multiple inputs and outputs. Correct connection of these wires is essential for proper operation of the harness. Any unused connections should be insulated. All available in cabin connections are outlined below:

Violet/Black	→	DPO 1 - Spare DPO
Violet/Brown	→	DPO 2 - Spare DPO
Yellow/Violet	→	IGN 7 - Spare DPO
Yellow/Grey	→	IGN 8 - Spare DPO
Grey/Yellow	←	AVI 1 - Spare AVI
Orange/Black	←	AVI 2 - Spare AVI
Orange/Green	←	AVI 5 - Spare AVI
Grey/Orange	←	AVI 6 - Spare AVI
Grey/Black	←	SPI 2 - Spare SPI
Grey/Brown	←	SPI 3 - Spare SPI
White/Black	→	Oil Pressure Switch (to in-dash oil pressure light)
White/Red	→	Oil Pressure Gauge (to in-dash oil pressure gauge)
White/Orange	→	Coolant Gauge Signal (to in-dash coolant gauge)
White/Grey	→	Alternator Light (to in-dash alt light)
Orange/Grey	←	Starter Motor Solenoid (to +12V from the starter switch)
Pink	←	To +12V Switched Input
Grey/Red	→	+12V Sensor Supply
Orange	→	+5V DC Sensor Supply
Black/White	→	Sensor Ground
Orange/Blue	→	+12V Output to Fuel Pump (15A Max)

## **Spare Digital Pulsed Output (DPO1, DPO2, IGN8 IGN7)**

Spare Digital Pulsed Outputs (DPO) are located throughout the terminated harness. When the output is activated by the ECU, the output will switch to ground. Solenoid valves, shift lights, etc can be operated directly from these outputs, however high current devices such as thermofans and additional fuel pumps must be activated through a relay.

A relay can be wired between the DPO and the supplied +12V DC on the connectors, this way the output is only switching the relay and not a high current draw device.

**The Digital Pulsed Outputs are limited to 1A Max current draw.**

## **Analogue Voltage Inputs (AVI1, AVI2, AVI5, AVI6)**

The Analogue Voltage Inputs (AVI) can accept variable voltages from 0V to 5V. These inputs can also accept switched inputs that change between two different voltage levels. The switch on voltage and switch off voltage define what the thresholds are between the on and off states. The voltage can be viewed as a channel in the ESP software to determine thresholds for a switched input.

The AVI-1, AVI-2 and AVI-5 labelled wires are spare Analogue Voltage Inputs. These inputs can be programmed within the ESP Software to read variable voltage inputs such as:

- O2 Sensors
- Pressure Sensors
- Temperature Sensors
- Various Switches

For a full list of input options and explanations please go to the help section within the ESP Software.

## **Synchronised Pulsed Inputs (SPI2, SPI3)**

The Synchronised Pulsed Input (SPI) can accept digital or retractor input that can vary in duty and/or frequency. These inputs can be programmed within the ESP Software to read inputs such as:

- Vehicle Speed Sensor
- Crank Angle Sensor
- Cam Angle Sensor
- Fuel Flow Sensor

For a full list of output options and explanations please go to the help section within the ESP Software.

## **+12VDC Switched Input**

This input must be connected to a +12VDC switched ignition source. This is required to turn on the Haltech ECU and all relays contained within the fusebox.

### **Oil Pressure Switch (OIL-P Switch)**

The oil pressure switch wire connects directly to an OEM cluster pressure switch light. A wire has been run from the sensor to the in-cabin harness labelled as OIL-P Switch. This must be connected directly to an OEM oil pressure gauge sensor and the dash cluster for correct operation of the cluster light.

### **Oil Pressure Gauge (OIL-P Gauge)**

The oil pressure gauge wire connects directly to an OEM cluster pressure gauge. A wire has been run from the sensor to the in-cabin harness labelled as OIL-P Gauge. This must be connected directly to an OEM oil pressure gauge sensor and the dash cluster for correct operation of the cluster gauge.

### **Coolant Gauge**

The coolant temperature sensor gauge wire connects directly to an OEM cluster temperature gauge. A wire has been run from the gauge sensor to the in cabin harness labelled "CTS-Gauge". This must be connected to an OEM coolant gauge sensor and the dash cluster for correct operation of the cluster gauge.

### **Alternator Light**

The alternator light wire connects directly to an OEM cluster alternator light. A wire has been run from the alternator to the in cabin harness labelled "Alt-Light". This must be connected to an OEM alternator and the dash cluster for correct operation of the cluster light.

## Fuel Pump Output (Fuel Pump +12V DC)

The fuel pump output supplies a continuous +12V DC supply to the fuel pump when the engine is running.

This output wire is rated for a max continuous current draw of 15A (through relay located inside the fuse box).

The fuel pump output wire can be connected directly to the positive side of the fuel pump, providing the pump in use will draw less than 15A of current under full load.

If your pump will draw more than 15A or if dual pumps are to be used, it is recommended that you use this wire to control a relay to turn on the fuel pumps.



**Figure 10 - Fuel Pump Output wire, 15A Max Continuous Current**



# Fuse Box

The Haltech fuse box is connected to the harness.

Contained within the Haltech fuse box is 6 fuses and 6 relays.


Each fuse protects the corresponding relay output (ie fuse #1 protects relay output #1, fuse #2 protects relay output #2 and so on).

The Haltech fuse box can handle a maximum continuous current draw of 70A, exceeding this value may cause damage to the fuse box, therefore please ensure all auxiliary devices, fans and fuel pumps connected **do not** exceed the supplied fuse box current limit.

The functions of each of the relays are outlined below:


Fuse #	Relay #	Function	Fuse Required
F1	R1	+12V Output to ECU	10A
F2	R2	+12V Output to Injectors	20A
F3	R3	+12V Output to Ignition	15A
F4	R4	+12V Output to Fuel Pump	20A
F5	R5	Unpopulated	-
F6	R6	Unpopulated	-

**Figure 11 - Haltech fuse box relay allocation table**

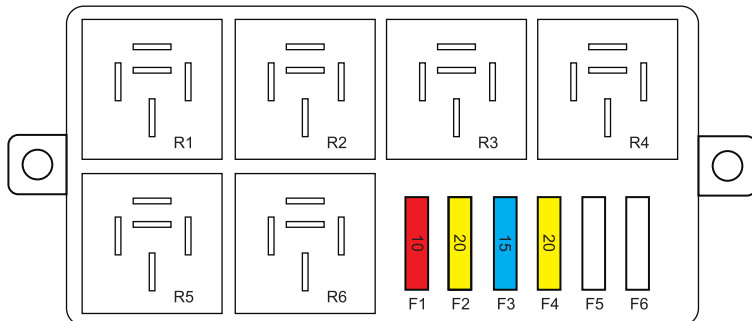

**Figure 11 - Haltech fuse box layout**

# Harness Pinout

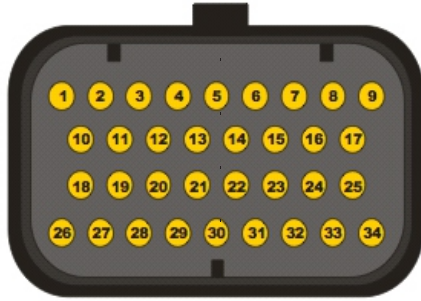

**(34 Pin Connector)**

ECU Connector (34 Pin Plug)	Function	Description
A1	DPO 2	Spare Output (In Cabin Loom)
A2	AVI 4	Oil Pressure Sensor (Fitment of Oil Pressure Sensor Required)
A3	IGN 1	Ignition Coil #1
A4	IGN 2	Ignition Coil #2
A5	IGN 3	Ignition Coil #3
A6	IGN 4	Ignition Coil #4
A7	IGN 5	Ignition Coil #5
A8	IGN 6	Ignition Coil #6
A9	+5V	+5V DC Sensor Supply
A10	BATTERY GROUND	Battery Negative
A11	BATTERY GROUND	Battery Negative
A12	+8V	+8V DC Sensor Supply
A13	IGNITION INPUT	Ignition Switch (In Cabin Loom)
A14	AVI 10	Throttle Position Sensor
A15	AVI 9	Map Sensor (Fitment of Haltech 5 Bar Map Sensor Required)
A16	AVI 2	Spare Analogue Voltage Input (In Cabin Loom)
A17	AVI 3	Fuel Pressure Sensor (Fitment of Fuel Pressure Sensor Required)
A18	DPO 1	Spare Output (In Cabin Loom)
A19	INJ 1	Injector #1
A20	INJ 2	Injector #2
A21	INJ 3	Injector #3
A22	INJ 4	Injector #4
A23	DPO 3	Spare Output (In Engine Bay)
A24	DPO 5	Fuel Pump (+) 15A Max
A25	DPO 6	Engine Control Relay
A26	+12V (INJ)	Fused Power
A27	INJ 5	Injector #5
A28	INJ 6	Injector #6
A29	INJ 7	VCT Solenoid (CAM Control)
A30	INJ 8	AAC Valve (IDLE Air Control)
A31	STEP1 P1	Spare Output
A32	STEP1 P2	Spare Output
A33	STEP1 P3	Spare Output
A34	STEP1 P4	Spare Output



**(26 Pin Connector)**

ECU Connector (26 Pin Plug)	Function	Description
B1	TRIGGER	Crankshaft Position Sensor (+)
B2	HOME	Cam Position Sensor (+)
B3	AVI 7	Air Temperature Sensor (Fitment of Air Temperature Sensor Required)
B4	AVI 8	Coolant Temperature Sensor (Fitment of Coolant Temperature Sensor Required)
B5	TRIGGER -	-
B6	HOME -	-
B7	SPI 4	Vehicle Speed Sensor
B8	SPI 1	Spare Synchronised Pulsed Input (In Engine Bay)
B9	SPI 2	Spare Synchronised Pulsed Input (In Cabin Loom)
B10	SPI 3	Spare Synchronised Pulsed Input (In Cabin Loom)
B11	+12V (ECU)	Fused Power
B12	AVI 6	Spare Analogue Voltage Input (In Cabin Loom)
B13	AVI 1	Spare Analogue Voltage Input (In Cabin Loom)
B14	SIGNAL GROUND	Signal Ground for Input Sensors
B15	SIGNAL GROUND	Signal Ground for Input Sensors
B16	SIGNAL GROUND	Signal Ground for Input Sensors
B17	IGN 7	Spare Output (In Cabin Loom)
B18	IGN 8	Spare Output (In Cabin Loom)
B19	DPO 4	Spare Output (In Engine Bay)
B20	AVI 5	Spare Analogue Voltage Input (In Engine Bay)
B21	KNOCK 1	Knock #1 Sensor
B22	KNOCK 2	Knock #2 Sensor
B23	CAN HIGH	Auxiliary CAN Connector
B24	CAN LOW	Auxiliary CAN Connector
B25	DBW 1	Spare Output (Available to Elite 2500 only)
B26	DBW 2	Spare Output (Available to Elite 2500 only)



### Need more help?



Intl: +61 2 9729 0999  
USA: +1 888 298 8116



Intl: [support@haltech.com](mailto:support@haltech.com)  
USA: [usasupport@haltech.com](mailto:usasupport@haltech.com)



[www.haltech.com](http://www.haltech.com)



[/Haltechecu](https://www.youtube.com/Haltechecu)



[/HaltechEngineManagement](https://www.facebook.com/HaltechEngineManagement)